
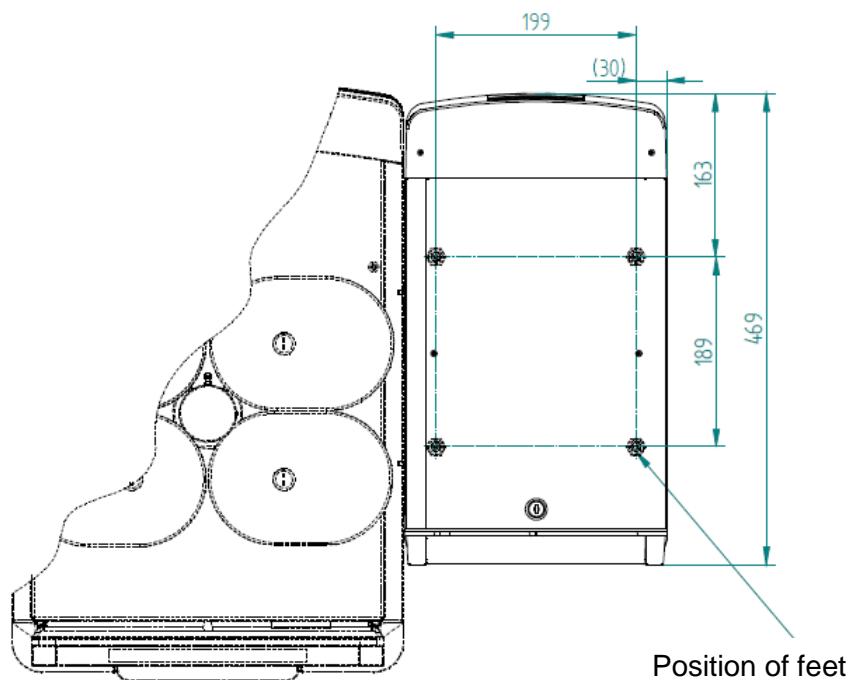


WMF Syrup Station for 1500 S+, 5000 S+ and 9000 S+ planning information

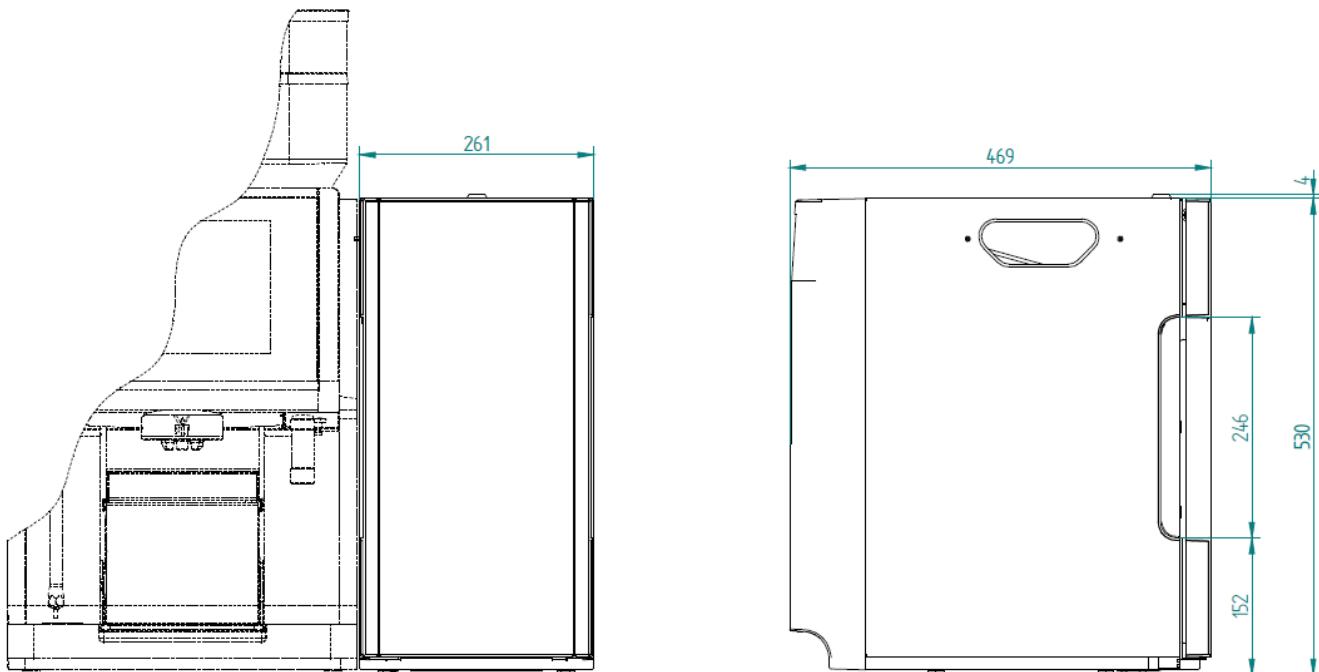

WMF Syrup Station for 1500 S+, 5000 S+ and 9000 S+ planning information

Conditions for usage and installation

Any necessary on-site preparatory work for electricity, water and drainage connections at the customer's premises is to be arranged by the machine owner / operator. The work must be carried out by authorised installation technicians in compliance with general, country-specific and local regulations. The WMF service engineers may only connect the coffee machine to existing prepared connection points. WMF Service is neither authorised nor responsible for carrying out any on-site installation work prior to connection. In order to avoid possible faults from arising on our shielded data lines due to potential equalisation currents between the devices, an additional potential equalisation unit should be planned for devices connected to the vending system.

Dimensions and empty weight	Width Height Depth Weight Capacity	261 mm 530,5 mm 469 mm Approx. 16kg 9,5 l
Maximum dimension of syrup bottle	Max. diameter Max. height	85 mm 320 mm
Installation Clearance	For operating, service and safety reasons the machine should be installed with a clearance of not less than 50 mm at the back and sides from the building or non-WMF components. Caution: Installation of the syrupstation is only possible on the right side of the coffee machine.	
Ventilation	If ventilation possibility is limited sufficient ventilation need to be provided e.g machine on feet extension, active ventilation, additional ventilation slots/ openings in counter area. Ventilation slots must not be covered. Under certain circumstances a forced ventilation on site is necessary to ensure heat dissipation.	
Installation surface/ water spray	The device must be placed and leveled on a horizontal, sturdy, water-resistant, and heatproof base. The device must not be cleaned using a water jet. The device must be installed where it is protected against water spray. The device must not be located on a surface that is sprayed or cleaned with a water hose, steam jets, steam cleaner, or similar devices.	
Electrical connection	The syrup station is powered by the coffee machine	
Ambient temperature	+5 °C to maximum +35 °C (empty the water system in case of frost).	
Maximum humidity	80 % relative humidity without condensation. Do not use device outdoors.	

For more information as the instruction manual , safety data sheets and certificates , see:
<https://coffeeconnect2.wmf.com>

All information refers to coffee machines/ equipment as standard version. Individual solutions can differ from the standard version.